



## SMART-DRY 6 ALL-PURPOSE DRYING CABINET NFPA 1850 COMPLIANT

### STANDARD FEATURES


- Gentle drying without mechanical action.
- Dries from the inside and outside simultaneously using a dual circulation system.
- Programmable control.
- 6 detachable hangers are included in the standard design.
- Drying capacity of 6 large protective suits.
- Program ends with "cool down" to room temperature.
- Double overheat protection with backup sensor for increased safety.
- Interior lighting.
- 71 inches wide which allows for more room between the gear for faster drying.
- Easy to navigate programs with display, buttons, and braille.
- Adjustable preset start time.
- Adjustable feet from the inside of the cabinet.
- Powder coated galvanized steel.

### OPTIONAL FEATURES

- Detachable racks for gloves.
- Detachable racks for boots.
- Door hook racks attached on the inside of the door for additional accessories.

### HUMIDITY TRACKING SYSTEM - HTS

- The Smart-Dry 6 All-Purpose Drying Cabinet is equipped with the Humidity Tracking System (HTS) with temperature and humidity sensors. Senses the moisture level and interrupts the drying process when the laundry is dry.

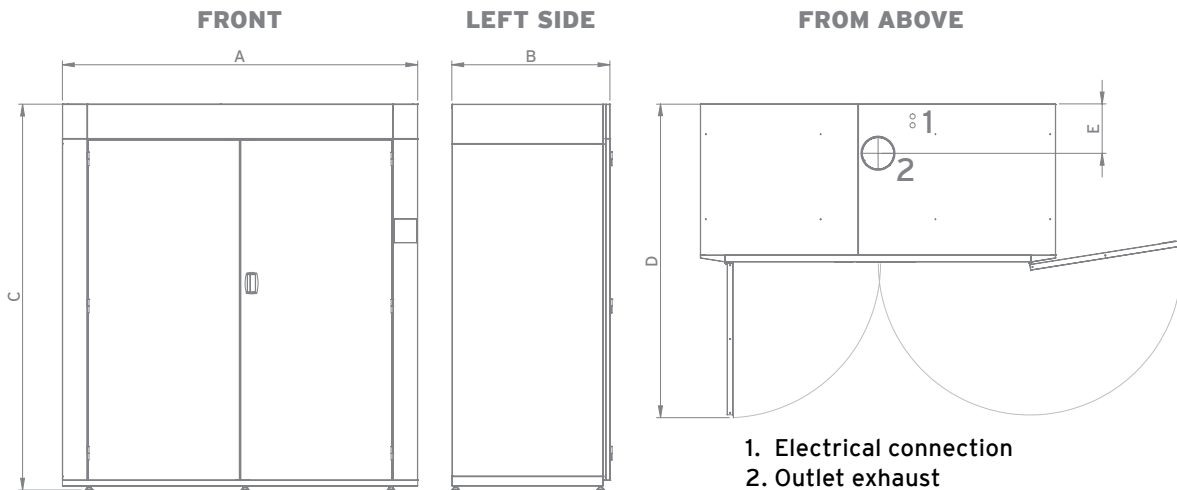

Dimensions  
in/mm

	A	B	C	D	E
Smart-Dry 6 All-Purpose Drying Cabinet	Width	Depth	Height	Depth with door	Exhaust position from back
	71 / 1800	31.5 / 800	77 / 1955	62.6 / 1590	9.84 / 250

# TECHNICAL SPECIFICATIONS

## SMART-DRY 6 ALL-PURPOSE DRYING CABINET

Machine Type		Drying Cabinet
Product Name		Smart-Dry 6
Product No.		SDC-6
<b>Main Data</b>		
Type		Air vented
Capacity, sets of turnout gear		6
Capacity (dry weight)	lbs / kg	55 / 25
Interior capacity	cu ft / L	73.1 / 2070
Drying capacity	oz/min / g/min	2 / 55
Energy consumption	kWh	6.7
Languages		8
Noise emission	dB(A)	65
<b>Electrical Installation</b>		
Electrical connection	3 phase	208-240v, 3ph, 60Hz, 12.45kw, 40amp
Electrical connection, (upon request)	1 phase	208-240v, 1ph, 60Hz, 9.45kw, 60amp
<b>Dimensions</b>		
Outer: width x depth x height	in / mm	71 x 31.5 x 77 / 1800 x 800 x 1955
Shipping: length x width x height	in / mm	75 x 30 x 50 / 1905 x 762 x 1270
<b>Weight</b>		
Weight	lbs / kg	441 / 200
Shipping weight	lbs / kg	600 / 272
<b>Ventilation</b>		
Outlet exhaust	Ø in / mm	6 / 152
Outlet air flow	cfm / m <sup>3</sup> /h	210 / 350
Pressure drop, max	psf / Pa	4.4 / 210
Maximum air flow (at 0% pressure)	cfm / m <sup>3</sup> /h	383 / 650
<b>Optional Accessories</b>		
Hooks for drying cabinet door: 3 separate rows with 4 hooks on each, 1 set = 1 door	Product No.	SDDH
Hanger for boots	Product No.	SDBH
Hanger for gloves	Product No.	SDGH

For freight cost savings, the drying cabinet ships knocked down in a crate. Assembly is required.

