




WASH • DRY • STORE • PROTECT

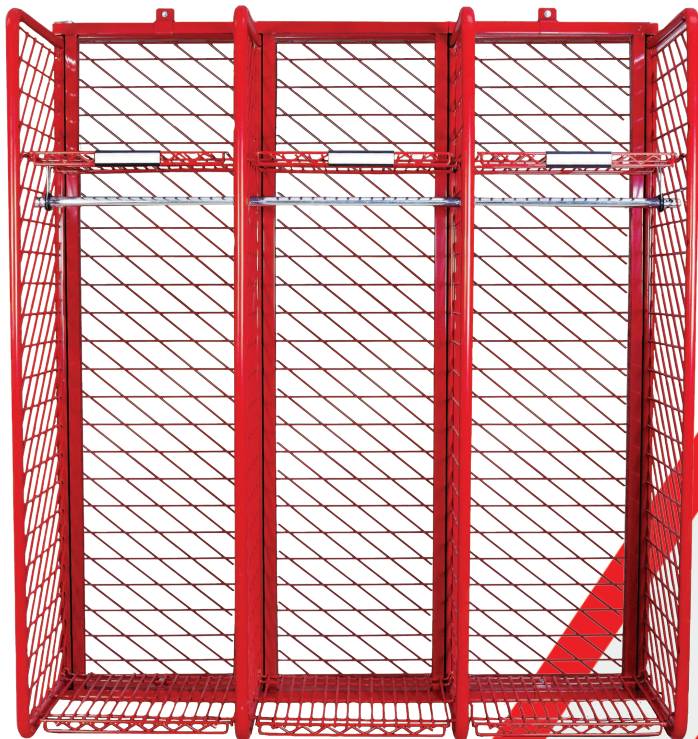


Red Rack Wall Mounted Rack


ITEM# RRWM - (Number of Compartments)
18, 20 or 24

ASSEMBLY INSTRUCTIONS & PARTS LIST

PARTS

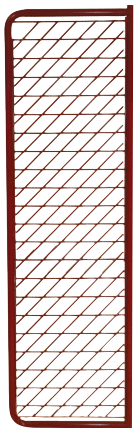

Divider panel
(DP-20)



Back frame
(BF - 18, 20 or 24)



Panel end cap
(PEC)




End cap
(ECP)



Hanging hook
(HWGR)



Wall mount kit
(WMK)



Label holder
(LAB)




End plugs
(EPS)


OPTIONAL PARTS (Not included)




Glove hanger
(GDH)



Top security shelf
(SS-18, 20 or 24)



Rear security panel
(SP-18,20 or 24)



Security door
(RD-18,20 or 24)



HLBS



Helmet holder
(HH)




Dry Kwik Hanger
DKH - (open or closed loop)



Hanging pole
(HP - 18, 20 or 24)



Bunker pant hook
(BPH)



Helmet/boot shelf
(HBS - 18, 20 or 24)

ALL PARTS SHOWN BELOW:

- Divider panel - DP-20
- Hanging hook - HWGR
- Panel end cap - PEC
- End cap - ECP
- Back frame - BF-18,20 or 24
- Label holder - LAB
- Wall mount kit - WMK
- End plugs - EPS
- Hanging pole - HP - 18,20 or 24
- Helmet/boot shelf - HBS - 18,20 or 24

TOOLS NEEDED:

- Measuring Tape
- Level
- 3/8" Drill Bit
- Power Drill
- 9/16" Wrench

Hardware to secure lockers to the wall, not included

OPTIONAL PARTS: (Not included)


- Security door - RD-18,20 or 24
- Rear security panel - SP-18,20 or 24
- Top security shelf - SS-18, 20 or 24
- Helmet holder - HH
- Glove hanger - GDH
- Dry Kwik Hanger- DKH- (open or closed)

VIDEO TUTORIAL:

- URL: www.youtube.com/user/readyrack
- Click "Videos" tab to find the video: Wall Mounted Red Rack Assembly Guide or copy and paste this link into your browser: <https://www.youtube.com/watch?v=0WoJ1wYGabo>

STEP 1

Start with a box of back frames (BF-18,20 or 24). On each back frame there is a square finished side and a tapered side. The finished side will be on the left. It is easier to start with one back frame for placement. Hold the frame against the wall and find your desired height. Make sure your back frame is level. Once you have decided on a height you will want to mark your bracket placement.

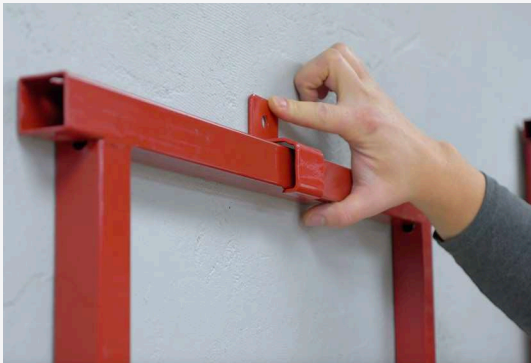

STEP 2

The wall mount clips (WMK) are what hold the rack to the wall. Slide one of the clips over the top and bottom rails of the back frames. There will be a hole in the center of the wall mount clips. Use a marker to make a dot on the wall through the hole. These two spots will be where you drill your first two holes.



STEP 3

Following the installation hardware guidelines on pg. 6, use the appropriate drill bit and drill your holes. Now you can secure the back frame to the wall with the wall mount clips using the appropriate hardware. Make sure the anchors are tight and the back frame is snug to the wall. ****If you are using a rear security panel with your lockers, you must attach the rear security panel to the back frame before securing the back frame to the wall*.***



STEP 4

Build down the wall, securing one back frame at a time. Connecting the next back frame by sliding it's tapered end into the previous back frame and following the instructions from step 3 for securing it. You will use two wall mount clips for each back frame.



STEP 5

Connect the divider panels (DP-20) to the back frames. Each divider panel will come with two bolts attached to it. Position the divider panel to the outside or in between the back frames. There is a top and bottom to the divider panel. The bottom of the divider panel will have two extra holes. These extra holes are not used for wall mounted units, but make sure all of your divider panels are facing the same way. Use a 9/16" wrench to put the bottom bolt in first and then insert the top bolt. Make sure to tighten bolts. ****If installing the top security shelf, you will want to attach the shelf between the divider panels first before tightening down the bolts. The lip of the security shelf should face the front and downwards. The half circle mounts of the security shelf will hug the top tubular section of the divider panel****



STEP 6

With the back frames and divider panels installed. You can move on to the helmet/ boot shelves (HBS-18, 20 or 24). Determine your desired height for the shelves. To install, tilt the shelf at an upward angle and slide the downward facing hooks through the diagonal wires of the divider panel. Then lower the shelf in place so that hooks from both sides of the shelf are level.



STEP 7

Once the helmet shelves are in place you can install the hanging pole in each compartment. Using two hanging wire grommets, attached one to each end of a hanging rod and hang it from the underside of the helmet shelf. Insert the end caps to each end of the hanging pole.



STEP 8


At this point you may install the bunker pant hooks (BPH) and any other optional accessories you have purchased. Such as additional hangers, helmet holders or personal property boxes.



STEP 8A

This step is for installing the optional security door. Starting at the far left locker compartment, attach the door latch to the middle set of pre-drilled holes on the first divider panel. Put the latch on the inside of the compartment and insert one nut into the latch. Insert the screw into the recessed hole on the other side of the divider panel and tighten with an allen wrench. Move to your right and install the hinge brackets on the second divider panel. Attach the hinge to the right side of the divider panel at the top set of pre-drilled holes and insert one nut. Now insert one screw on the other side and tighten with the allen wrench. Repeat the process with the other hinge bracket on the bottom set of holes. Keep repeating the entire process working your way to the right. Make sure you have all latch and hinge brackets attached before installing the security doors.



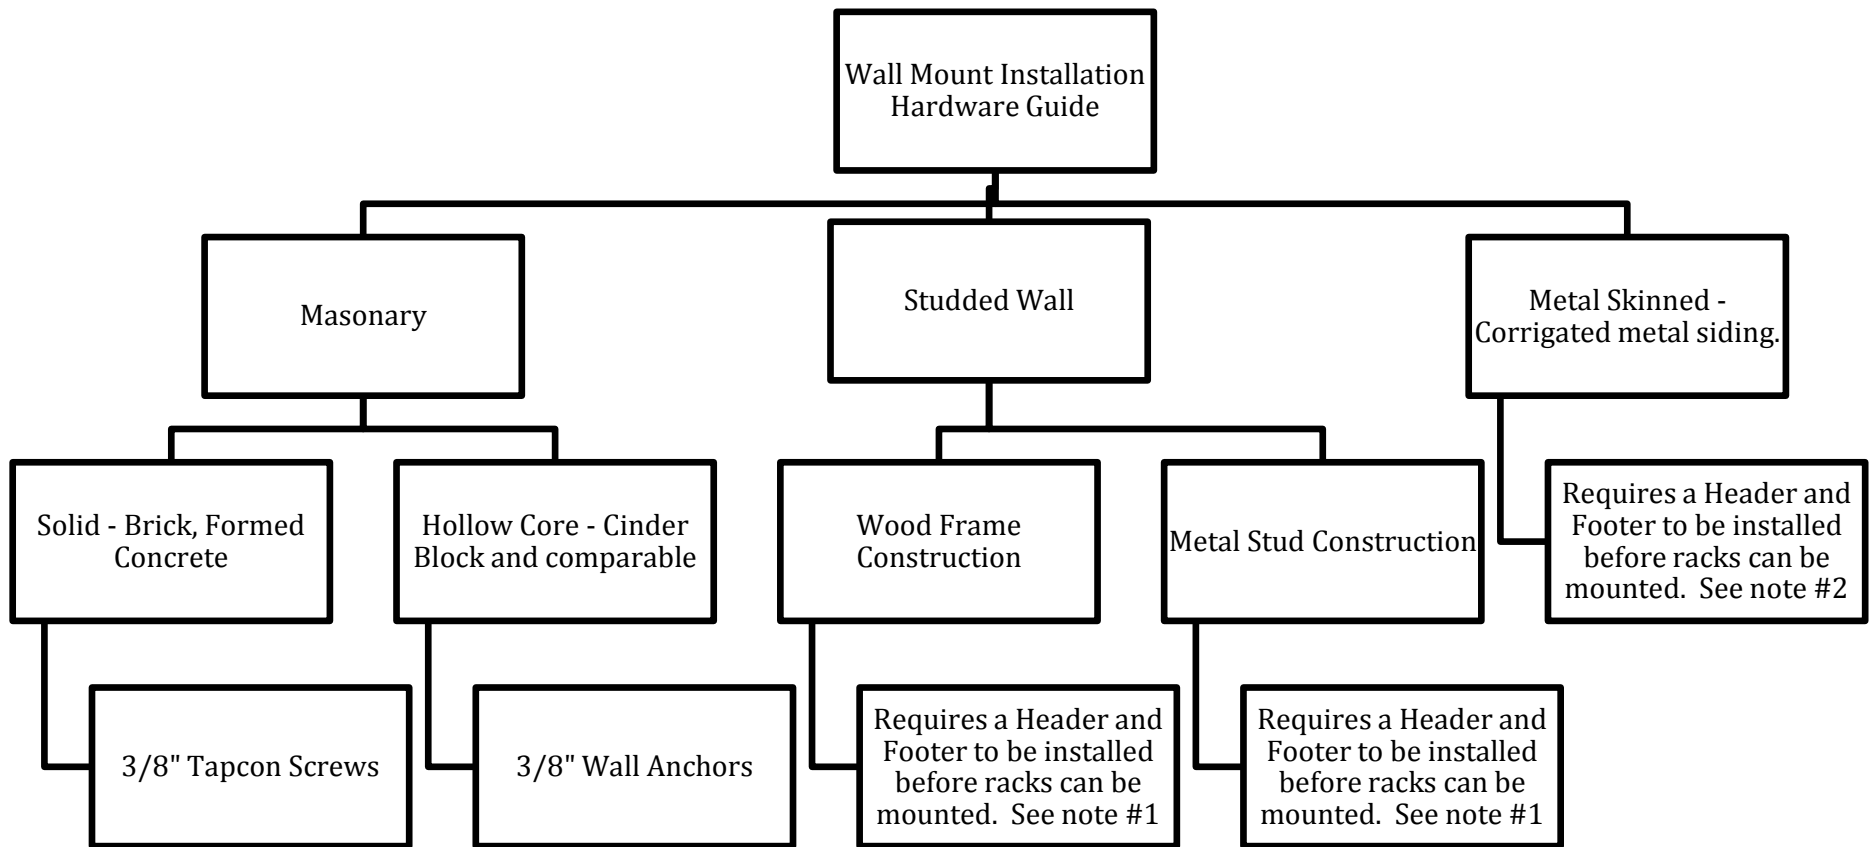

Note #1 – A 2” x 6” header and footer should be installed on the wall. When anchoring the header and footer use 3/8” x 3” lag screws placed on center of every stud the rack will cross. Once the header and footer are installed mount the rack to them as you would on a masonry type wall using 3/8” x 1” lag screws. For metal studded walls mount the header and footer following stud manufacturer guidelines.

Note #2 – A 2” x 6” header and footer should be installed on the wall. When anchoring the header and footer use 3/8” galvanized or stainless bolts the required length necessary to provide a strong anchor point through the wall. Once the header and footer are installed mount the rack to them as you would on a masonry type using 3/8” x 1” lag screws.



Please visit readyrack.com/guides to find more information and other assembly instruction guides.



*Front security doors are sold separately. Gear not included.
Ready Rack Bench also available for purchase.*

To watch the assembly video, type this link into your browser: <https://www.youtube.com/watch?v=0WoJ1wYGabo>

"WE TAKE CARE OF THE GEAR THAT TAKES CARE OF YOU"

GROVES INCORPORATED
818 TRAKK LN, WOODSTOCK, IL 60098
800-991-2120 • SALES@GROVES.COM
WWW.READYRACK.COM

